



SX-8 Specifications & Options

ENGINE

- Tier 4i, Caterpillar® C18 755 hp (563 kW) @ 1,900 rpm

WEIGHT

- Shipping weight..... 73,000 lbs (33,180 kg)
- Operating weight 75,000 lbs (34,090 kg)

ELECTRICAL SYSTEM

- CAN-bus serial communication systems for superior performance, reduced wiring, increased reliability & improved service and maintenance features.

PROPEL SYSTEM

- 2-speed hydrostatic drive
- 4-wheel drive with 4 pumps

SPEED

- Travel 6 mph (10 kph)
- Work 266 fpm (81 mpm)

TIRES

- Heavy-duty, three-piece wheels prevent rim slippage and tire failure. High-flotation, deep tread 26.5 x 25 tires

STEERING

- Joy stick-controlled. Four steering modes: coordinated steer, crab steer, front steer only, rear steer only.
- Turning radius 14' (4267 mm) in cut

OPERATOR STATION

- Fully enclosed and pressurized with A/C and heating system
- The cab can extend up to 18" (1893 lpm) to the right side of the machine

INJECTION SYSTEM

- Water or emulsion
- Up to 500 gpm (457 mm)

CUTTER SYSTEM

- Multi groove v-belts
- Hydraulic clutch
- 4 speed air shift transmission
- Planetary gearbox final drive with auto belt tension

CUTTER

- Right-hand flush cut
- Cutting width 120" (3,048 mm)
- Cutting depth..... 16" (406 mm)
with 50" drum (1,270 mm)
- Max cutting depth..... 20" (508 mm) (with 58" drum)
with 58" drum (1,473 mm)

CUTTER SPEEDS


- Number of speeds: 4
- Speed 1 92 rpm
- Speed 2 118 rpm
- Speed 3 146 rpm
- Speed 4 181 rpm



SERVICE CAPACITIES

- Fuel Tank 320 gal (1211 l)
- Hydraulic Fluid Tank..... 62 gal (234 l)
- Air System..... 30 gal (114 l)

Cab can side-shift to the right 18" (457 mm)

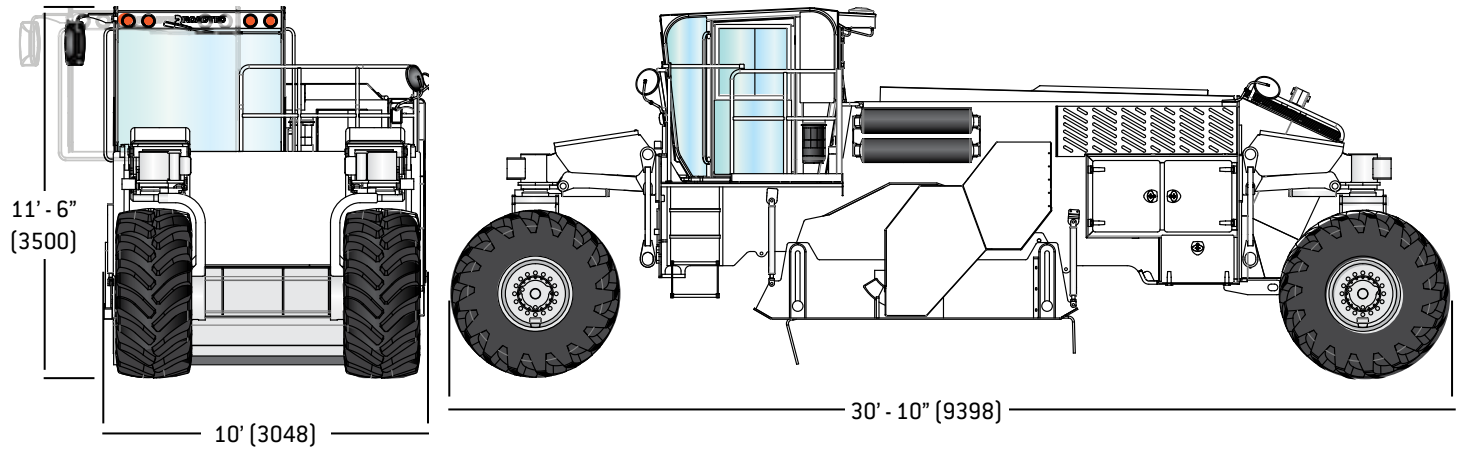

Dimensions in brackets are mm.

Specifications are subject to change without notice.

ROADTEC an Astec Industries Company

800 MANUFACTURERS RD • CHATTANOOGA, TN 37405 USA • 800.272.7100 • FAX 423.267.7104 • roadtec.com



© 2013 Roadtec, Inc. All Rights Reserved