


CONE CRUSHER CS SERIES

CS660

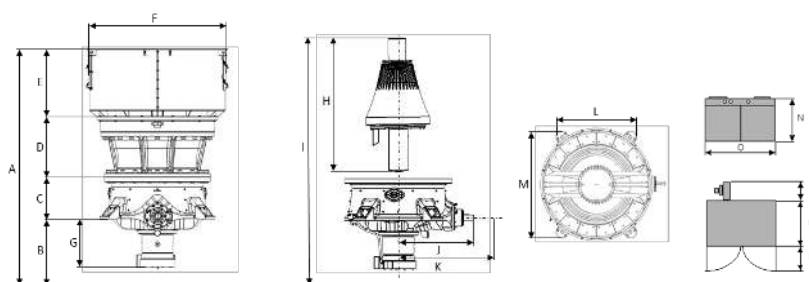

DIMENSIONS (mm)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
5 100	1 600	860	1 240	1 400	2 810	970	2 895	5 346	1 497	2 156	1 528	2 103	993	1 766	951	1 252	691

WEIGHTS (kg)

Feed hopper	Spider cap	Topshell, complete	Mainshaft assembly complete	Eccentric, complete	Bottomshell assembly complete	Pinionshaft housing complete	Hydroset cylinder complete	Total Weight (approx.)	Oil tank
1 800	790	15 600	7 890	1 170	10 100	565	1 443	35 000	520

PERFORMANCE

Nominal capacities MTPH	Chamber	EC	C
	CSS	230-260	210-240
	GG	245	220
	SH	385	360
	ML	560	500
Max motor power (kW)		315	315
Ecc. Throw (mm)		20-40	20-40
	35	-	335
	38	331-385	350-464
	41	345-514	364-542
	44	359-593	379-564
	48	378-624	399-593
	51	392-647	413-615
	54	406-670	428-637
	57	420-693	443-659
	60	433-716	458-681
	64	452-746	477-710
	70	480-792	507-589
	76	506-756	-
	83	540	-

CSS (mm)

